


Raychem VLKTV

SELF-REGULATING HEATING CABLES FOR LONGLINE SYSTEMS

Electrical freeze protection and temperature maintenance in both nonhazardous and hazardous locations

Heating cable construction

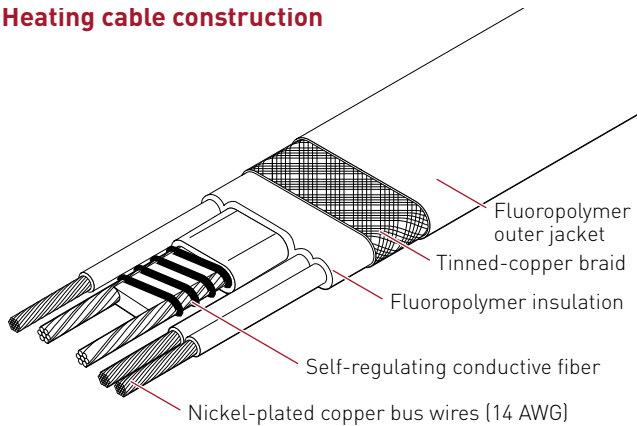

PRODUCT OVERVIEW

VLKTV provides high-temperature maintenance for longline applications. VLKTV can also be used to provide low-temperature maintenance for long lines that are exposed to high temperatures. The VLKTV heating cable can withstand continuous exposure to temperatures up to 300°F (150°C), and intermittent exposure to 420°F (215°C).

The cables are configured for use in nonhazardous and hazardous locations, including areas where corrosives may be present.

VLKTV2-CT provides very long circuit length capability. It can be used for continuous circuit lengths of 1,000 (305 m) to 6,000 feet (1830 m), powered from a single source. VLKTV is especially well suited for tracing long pipelines containing temperature-sensitive fluids or where extreme reliability is required.

APPLICATION

Area classification	Nonhazardous and hazardous locations
Traced surface type	Metal
Chemical resistance	Organic and aqueous inorganic chemicals and corrosives

SUPPLY VOLTAGE

480–600 Vac 3-Phase, 4-Wire

TEMPERATURE RATING

Maximum continuous exposure	300°F (150°C)
Maximum intermittent exposure (power on or off)	420°F (215°C)
Minimum installation temperature	-40°F (-40°C)

TEMPERATURE ID NUMBER (T-RATING)

T2C: 446°F (230°C)
 Temperature ID numbers are consistent with North America national electrical codes.

Based on systems approach* T3-T6

* Raychem VLKTV heating cables are approved for T3 – T6 temperature classes when stabilized or controlled designs are used according to the requirements of applicable national and international approvals standards. Use TraceCalc Pro design software or contact Pentair Industrial Heat Tracing Solutions.

CIRCUIT LENGTH

	480 Vac 3-Phase, 4-Wire	600 Vac 3-Phase, 4-Wire
Minimum length	1,000 ft (305 m)	2,000 ft (610 m)
Maximum length	5,000 ft (1,525 m)	6,000 ft (1,830 m)

APPROVALS

Hazardous Locations



Class I, Div. 2, Groups B, C, D
Class II, Div. 2, Groups F, G
Class III

Nonhazardous Locations



DESIGN AND INSTALLATION

For proper design and installation of a VLKTV system and connection kit selection, contact Pentair Industrial Heat Tracing Solutions. Literature is available via the Pentair Industrial Heat Tracing Solutions web site, www.pentairthermal.com.

MINIMAL POWER OUTPUT RATINGS ON INSULATED METAL PIPES


Circuit length

- A** 1,000 ft
- B** 2,000 ft
- C** 3,000 ft
- D** 4,000 ft
- E** 5,000 ft
- F** 6,000 ft


W/M = 3.28 X W/FT
°C = 5/9 (°F-32)

* For power output inside U-shaped channels, consult Pentair Industrial Heat Tracing Solutions.

**480 Vac
3-Phase
4-Wire**

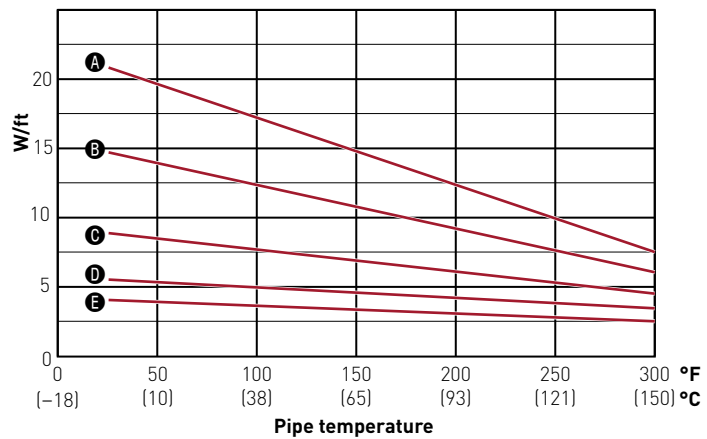

**600 Vac
3-Phase
4-Wire**

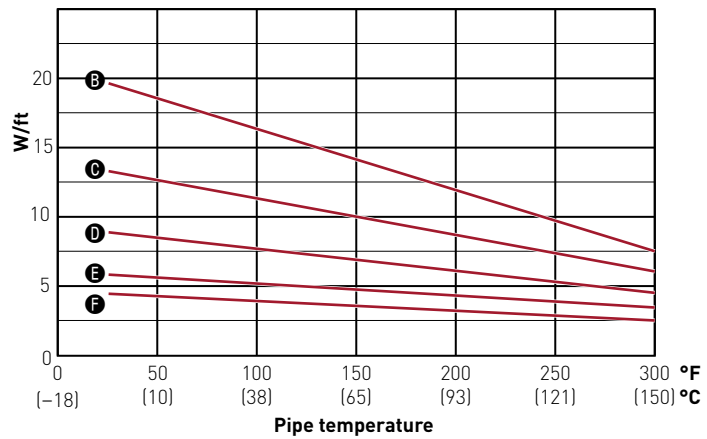

ORDERING DETAILS

Description	Part number
VLKTV2-CT	429707-000

CONNECTION KITS

These connection kits must be used to ensure proper functioning of the product and compliance with warranty, code, and approvals requirements: VKK-System, VKK-S (splice).



WWW.PENTAIRTHERMAL.COM

NORTH AMERICA

Tel: +1.800.545.6258
Fax: +1.800.527.5703
Tel: +1.650.216.1526
Fax: +1.650.474.7711
thermal.info@pentair.com

EUROPE, MIDDLE EAST, AFRICA

Tel: +32.16.213.511
Fax: +32.16.213.603
thermal.info@pentair.com

ASIA PACIFIC

Tel: +86.21.2412.1688
Fax: +86.21.5426.2937
cn.thermal.info@pentair.com

LATIN AMERICA

Tel: +1.713.868.4800
Fax: +1.713.868.2333
thermal.info@pentair.com

Pentair and VLKTV are owned by Pentair or its global affiliates. All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice..

© 1996–2016 Pentair.