

TRACETEK TT-FFS

DATA SHEET



PRODUCT OVERVIEW

Tracetek Fast Fuel Sensor is a fast acting probe designed to detect hydrocarbon fuel floating on water, spreading on a flat surface or collecting in a sump. The probe ignores water, but detects a thin film of fuel floating on the surface.

Reaction time for the probe is typically a few seconds for light or middle weight fuels such as gasoline, jet fuel, and diesel. It is also responsive to crude oil and some heavier weight fuels and heating oils but becomes progressively slower as the fuel volatility decreases.

The standard version of the Fast Fuel Sensor meets the FM 7745 Approval Standard for Diesel Leak Detectors for detecting Diesel Fuel leaks in commercial buildings. It improves the safety of diesel generators used for back-up electrical power, reducing the risk of fire if a leak were to occur. The Fast Fuel Sensor may be used for the same purpose near oil storage tanks used to fuel boilers or other heating related equipment in commercial buildings.

The outdoor version of the Fast Fuel Sensor is effective at detecting overflow leaks in hydrocarbon storage tanks in tank farms. It is also an ideal solution for monitoring hydrocarbon contamination on water or in sumps using a float assembly.

In many cases the FFS probe will reset after the probe is removed from contact with the spill and the fuel is allowed to evaporate. Some heavier fuels require that the sensor be soaked in isopropyl alcohol or naphtha in order to clear the heavier fuel residuals.

The sensor may be used repeatedly without replacement until it will no longer reset. The probe fails in the "alarm" state so there is no ambiguity when it is necessary to replace the probe.


TT-FFS probes are designed to work only with Tracetek leak detection instruments, and are not suitable for use with other non-Tracetek circuits. The probe may be periodically tested using a small amount naphtha (lighter fluid). The probe resets when the naphtha evaporates.

Design features

- Fast response to small amount of fuel
- Resets for multiple uses
- Easily tested
- Compatible with Tracetek Instruments
- Intermix up to 3 FFS probes with TT5000 sensor cable to form hybrid cable and probe systems
- Suitable for installation in CID1 (Zone 0) with appropriate safety barrier
- SIL-2 Rated Safety System Component


| FFS Probes without Connectors | | FFS Probes with – MC Series Metal Connectors | |
|-------------------------------|-------------------|--|--------------------|
| Part number | Description | Part number | Description |
| P000000984 | TT-FFS-100-L-1 | P000000990 | TT-FFS-100-MC-1 |
| P000000985 | TT-FFS-100-L-3 | P000000991 | TT-FFS-100-MC-3 |
| P000000986 | TT-FFS-100-L-10 | P000000992 | TT-FFS-100-MC-10 |
| P000001943 | TT-FFS-100-L-10-I | P000001944 | TT-FFS-100-MC-10-I |
| P000000987 | TT-FFS-250-L-1 | P000000993 | TT-FFS-250-MC-1 |
| P000000988 | TT-FFS-250-L-3 | P000000994 | TT-FFS-250-MC-3 |
| P000000989 | TT-FFS-250-L-10 | P000000995 | TT-FFS-250-MC-10 |
| P000001945 | TT-FFS-250-L-10-I | P000001946 | TT-FFS-250-MC-10-I |

TT-FFS-250-MC-10-I

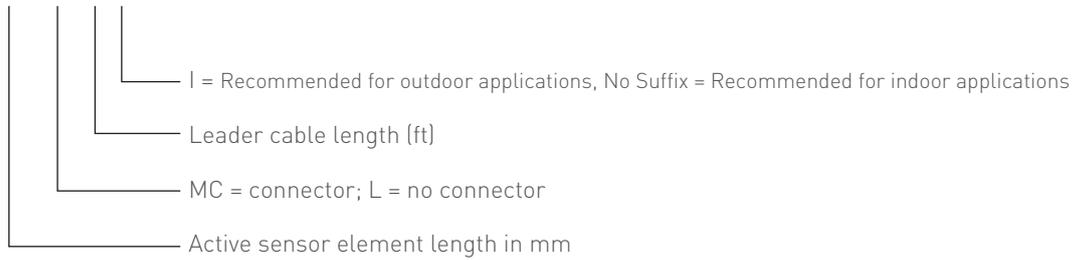


DIMENSIONS

For Indoor Application

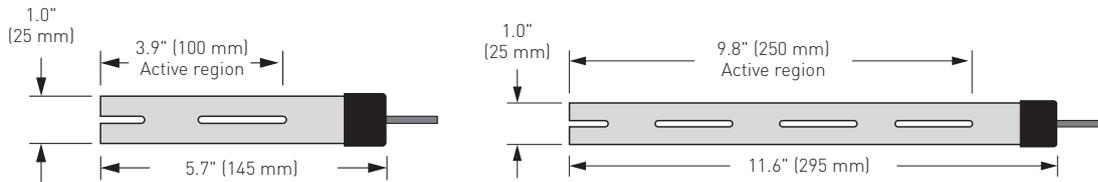

For Outdoor Application

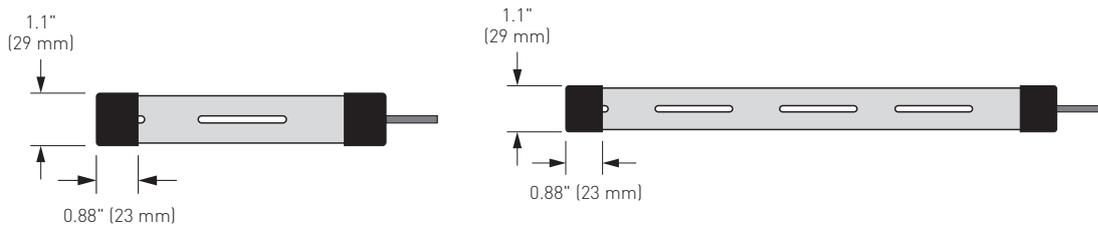

PRODUCT CHARACTERISTICS

| | |
|-------------------|---|
| External diameter | 1 inch (25.4 mm) |
| Color | Orange |
| Tube material | Polypropylene with static charge reduction additive |
| Leader cable | 4 x 22 AWG, polyurethane jacketed, fuel resistant |
| Connector | Tracetek "MC" series compatible with all Tracetek MC components and cable Note: FFS is wired in "End Termination" configuration |

OPERATING ENVIRONMENT INFORMATION

| | |
|--------------------------------|---|
| Operating/storage temperature | -40°F to 185°F (-40°C to 85°C) |
| Salt water immersion resistant | 30 days in 3% salt water at 20°C without failure or degraded response |
| Hot water immersion resistant | 30 days in 60°C water without failure or degraded response |
| Acid resistant | 24 hours in 10% H ₂ SO ₄ or 10% HNO ₃ without failure or degraded response |

RESPONSE TIME

| Representative materials detected | Typical response time at 20°C |
|-----------------------------------|-------------------------------|
| Gasoline | Less than 5 seconds |
| Jet A fuel | Less than 5 seconds |
| Diesel | Less than 5 seconds |
| Naphtha | Less than 5 seconds |
| Crude oil | 3 minutes |
| Biodiesel (B100) | 45 seconds |

APPROVALS



IS/Class I, Div. 1, Groups A, B, C, D/T4; Class I Zone 0, AEx ia IIC T4
NI/Class I, Div. 2, Groups A, B, C, D/T4; Class I Zone 2, Group IIC T4



IEC 61508 Safety Integrity Level -2 (when used with TTC-1)
Ref BN/PTX/CB859/1580190/06/R/216/0

Baseefa11ATEX0221X
IECEX BAS 11.0111X



Ex ia IIC T4 Ga [-40°C ≤ ta ≤ +85°C] (U_i = 15V)
Ex ia IIA T4 Ga [-40°C ≤ ta ≤ +85°C] (U_i = 28V)



WWW.PENTAIRTHERMAL.COM

NORTH AMERICA

Tel: +1.800.545.6258
Fax: +1.800.527.5703
Tel: +1.650.216.1526
Fax: +1.650.474.7215
thermal.info@pentair.com

EUROPE, MIDDLE EAST, AFRICA

Tel: +32.16.213.511
Fax: +32.16.213.603
thermal.info@pentair.com

ASIA PACIFIC

Tel: +86.21.2412.1688
Fax: +86.21.5426.2937
cn.thermal.info@pentair.com

LATIN AMERICA

Tel: +1.713.868.4800
Fax: +1.713.868.2333
thermal.info@pentair.com

Pentair and Tracetek are owned by Pentair or its global affiliates. All other trademarks are the property of their respective owners. Pentair reserves the right to change specifications without prior notice.

© 2006–2016 Pentair.

 @pentairTBS